


GR4E FIBERGLASS DATA SHEET

Applications

- Aerospace Industry
- Abrasion-Prone Areas
- Covers and Sleeves
- Expansion Joints
- Curtains and Pads
- Rough Terrain and Conditions

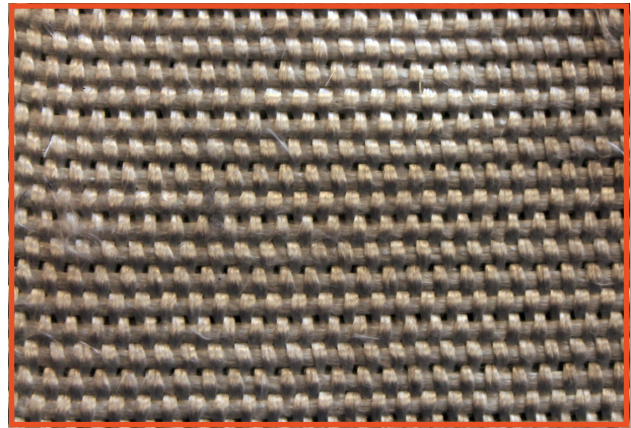

About the Fabric

| | |
|-----------------------------|----------------------------|
| Weave | Plain Weave |
| Coating | None |
| Weight | 59.0 oz / yd ² |
| Width | ≤ 22.5" |
| Thickness | 3.2" |
| Temperature Resistance | 1,022°F |
| Melting Temperature | 1,544°F |
| Filament Diameter (microns) | 9 x 9 |
| Number of Threads | Warp: 55.9" Weft: 25.4" |
| Yarn Count (tex) | Warp: 500 Weft: 820 |
| Tensile Strength (lbs/in) | Warp: min 787 Weft: 820 |

All statements are expressed opinion which we believe to be accurate, reliable, and presented without guarantee or responsibility on our part. The data presented above consists of typical properties and should not be used in preparing specifications. No warranties are expressed or implied and users should test this material thoroughly for their specific application.