


HS. 9.12-2E DATA SHEET

Applications

- Pipe wrap
- Furnace modules and liners
- Pre-heat and PWHT blankets/pads
- Welding slag protection
- Induction accessories
- Gaskets and seals
- Heat barriers and curtains
- Exhaust
- Custom sizes available

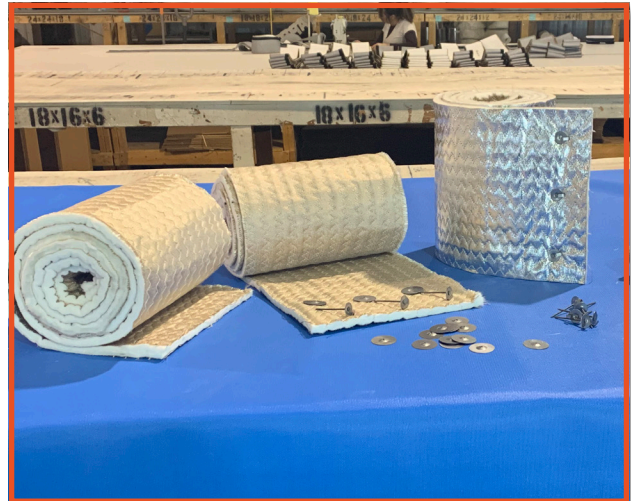

About the Fabric

Fabric	Satin weave
Content	Continuous fiberglass filament
Color	Tan
Coating	None
Temperature Resistance	1,000°F
Melting Temperature	Fiberglass Insulation: 1,470°F Aluminized Side: 1,200°F
Thickness	1/2" (12 mm)
Size	30' long x 40" wide
Insulation	Fiberglass needled mat Stitching every 1" 3 layered fiberglass pad Fiberglass fabric encasing fiberglass insulation.

All statements are expressed opinion which we believe to be accurate, reliable, and presented without guarantee or responsibility on our part. The data presented above consists of typical properties and should not be used in preparing specifications. No warranties are expressed or implied and users should test this material thoroughly for their specific application.