


PS-2800 E FIBERGLASS DATA SHEET

Applications

- Vertical Welding Curtains for Spark Containment
- Flash Barriers
- Heat Shields
- Fabric and Fire Resistant Coating are Specifically Designed to Resist Slag, Sparks, and Incidental Flame from Cutting Torches

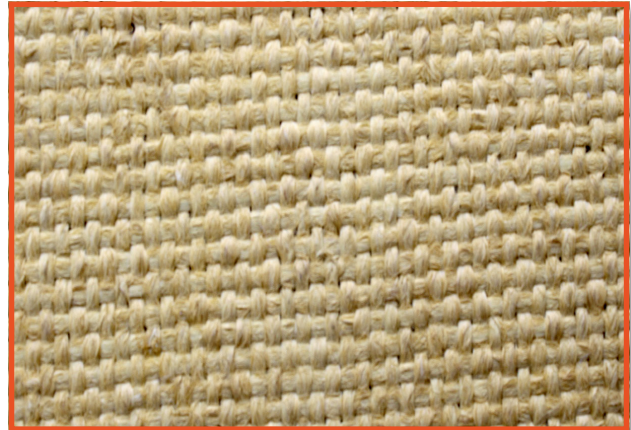

About the Fabric

Fabric	Plain weave, heavy fiberglass
Color	Yellow
Coating	Yellow acrylic
Weight	28 oz / y ² +/- 10 % oz / yd ²
Base Fabric	1,000°F
Temperature Resistance	-40°F to +300°F coating
Tear Strength	WARP 108 lbs FILL: 118 lbs
Tensile Strength	WARP: 425 lbs / inch FILL: 354 ends / inch
Burst Strength	670 psi
Flame Resistance	Flame Out - 1 second max Afterglow - 6 second max Char Length - 1/16 inch max

All statements are expressed opinion which we believe to be accurate, reliable, and presented without guarantee or responsibility on our part. The data presented above consists of typical properties and should not be used in preparing specifications. No warranties are expressed or implied and users should test this material thoroughly for their specific application.