


## PS-PTFE FIBERGLASS DATA SHEET

### Applications

- Removable Insulation Blankets
- Weather/Chemical Resistant Barrier
- Sleeves
- Insulation Pads
- Welding Protection
- Flange Covers

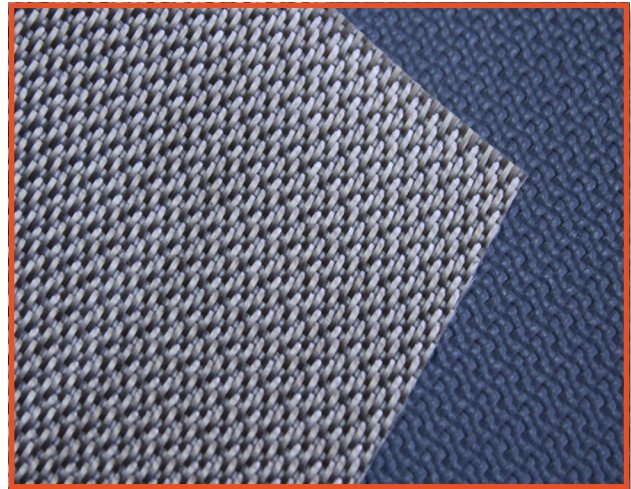

### About the Fabric

Fabric	Satin Weave Fiberglass
Color	One side black, one side gold
Coating	Fluorocarbon
Weigh	16.5 oz / y <sup>2</sup> +/- 10 % oz / yd <sup>2</sup>
Thickness	0.015 in +/- 10% in
Temperature Resistance	Service Temperature = -67°F to 600°F
Trapezoidal Tear	WARP 50 lbs FILL: 30 lbs
Tensile Strength	WARP: 400 lbs / in FILL: 300 lbs / in

All statements are expressed opinion which we believe to be accurate, reliable, and presented without guarantee or responsibility on our part. The data presented above consists of typical properties and should not be used in preparing specifications. No warranties are expressed or implied and users should test this material thoroughly for their specific application.